


| |
|---------|
| P-17550 |
| S5573 |
| X2550 |

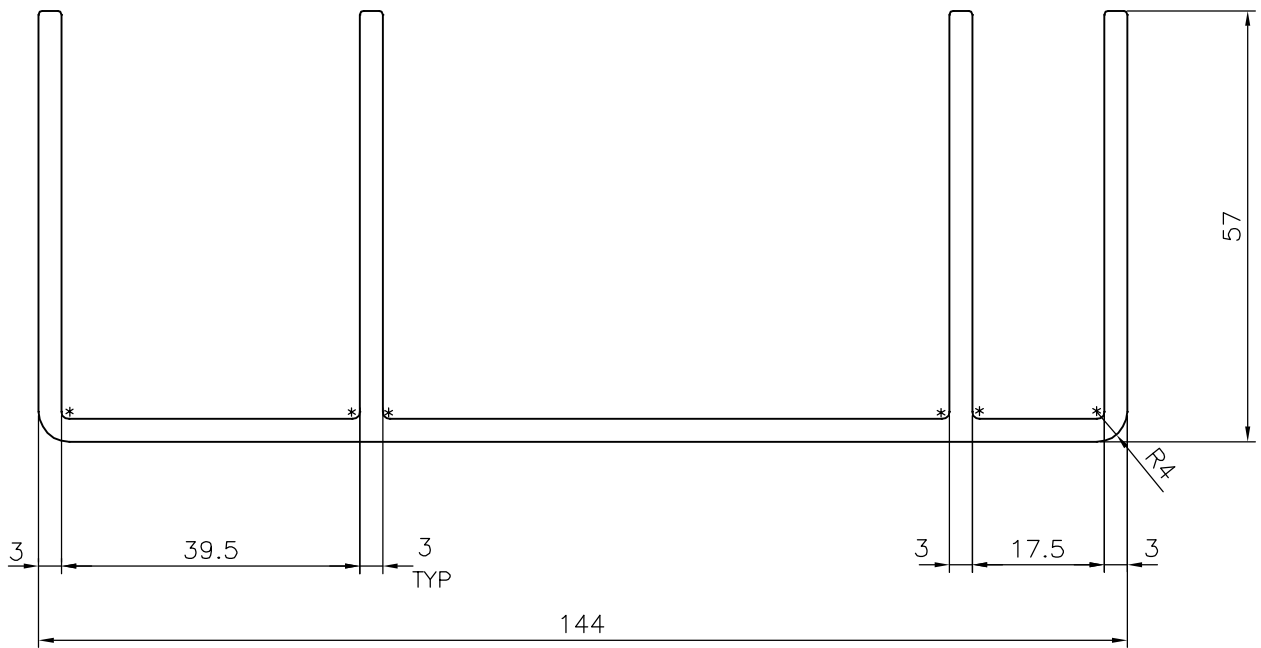


UNSPECIFIED RADIUS 0.5 mm

* = 1.0 RADIUS (6 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

| | | | |
|---------------------|----------------------|----------------------|-----------------------|
| UPTO 6.40mm - ±0.20 | UPTO 32.0mm - ±0.38 | UPTO 120.0mm - ±0.85 | UPTO 320.00mm - ±1.70 |
| UPTO 10.0mm - ±0.23 | UPTO 50.0mm - ±0.46 | UPTO 160.0mm - ±1.02 | |
| UPTO 12.0mm - ±0.25 | UPTO 60.0mm - ±0.53 | UPTO 200.0mm - ±1.14 | |
| UPTO 16.0mm - ±0.28 | UPTO 80.0mm - ±0.69 | UPTO 250.0mm - ±1.40 | |
| UPTO 25.0mm - ±0.30 | UPTO 100.0mm - ±0.75 | UPTO 300.0mm - ±1.65 | |

| | | | |
|--|---|----------------------|-------------|
|  SYMBOL OF QUALITY AN ISO 9001 COMPANY | JINDAL ALUMINIUM LTD. <i>BANGALORE-560073 (INDIA)</i> | NAME | DATE |
| | | DRAWN | J.P.KAUSHIK |
| | | CHECKED | |
| | | APPROVED | B.NATARAJA |
| | | | 08-11-2017 |
| 1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED | | SCALE | 1:1 |
| | | AREA mm ² | 1073.991 |
| | | PERIMETER mm. | 718.274 |
| | | WEIGHT kg/m | 2.900 |
| | | DRAWING No. | SECTION No. |
| | | P-17550 | - |
| | | S5573 | S5573 |
| | | X2550 | X2550 |
| | | | |
| | | | |
| PARTY'S NAME | PRESSTON ENGINEERING CORPORATION, BANGALORE | | |
| PARTY'S DRAWING No. | RMD60004CEO_REV_B | | |
| ALLOY & TEMPER | 6063 T6 | | |
| DESCRIPTION | DUCT PROFILE | | |