



P-15745

X2632



1:1

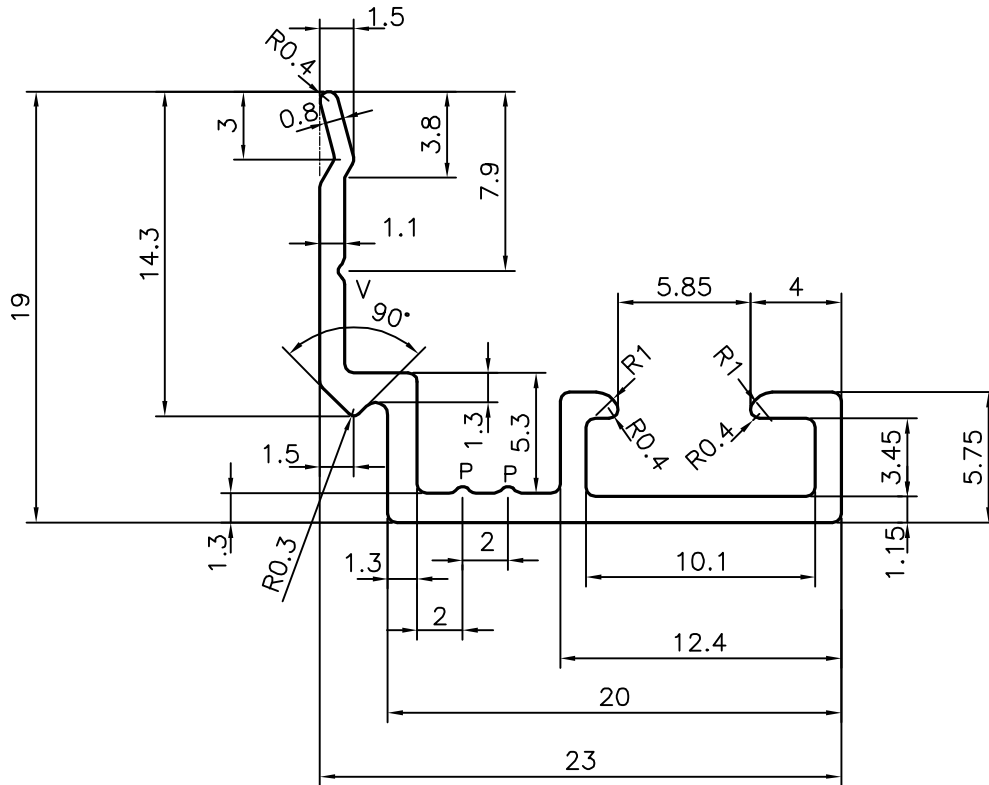

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

	CD ≤ 100	100 < CD ≤ 200	200 < CD ≤ 300	300 < CD ≤ 500
UPTO 10mm -	±0.25	±0.30	±0.35	±0.40
10.0 -25.0 -	±0.30	±0.40	±0.50	±0.60
25.0 -50.0 -	±0.50	±0.60	±0.80	±0.90
50.0 -100.0 -	±0.70	±0.90	±1.10	±1.30
100 - 150 -	-	±1.10	±1.30	±1.50
150 - 200 -	-	±1.3	±1.50	±1.80
200 - 300 -	-	-	±1.70	±2.10
300 - 450 -	-	-	-	±2.80

P = PIP 0.3x90°xR0.3 (2 PLACES)

V = VEE GROOVE 0.3x90°xR0.3



SYMBOL OF QUALITY  
AN ISO 9001 COMPANY

**JINDAL ALUMINIUM LTD.**  
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	26-10-2019
CHECKED		
APPROVED	B.NATARAJA	27-02-2020
SCALE		3:1
AREA mm <sup>2</sup>		63.069
PERIMETER mm.		107.537
WEIGHT kg/m		0.170
DRAWING No.		SECTION No.
P-15745		-
X2632		X2632

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER BS:EN-755-9, UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	PD ALUMINIUM LTD., UK
PARTY'S DRAWING No.	AS PER SAMPLE PDG 25
ALLOY & TEMPER	6063 T6
DESCRIPTION	MISC. SECTION