

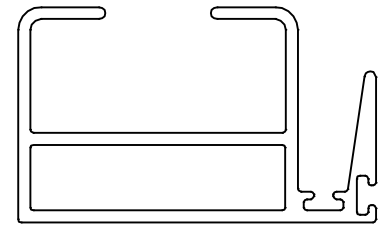


P-23018-1

X3019

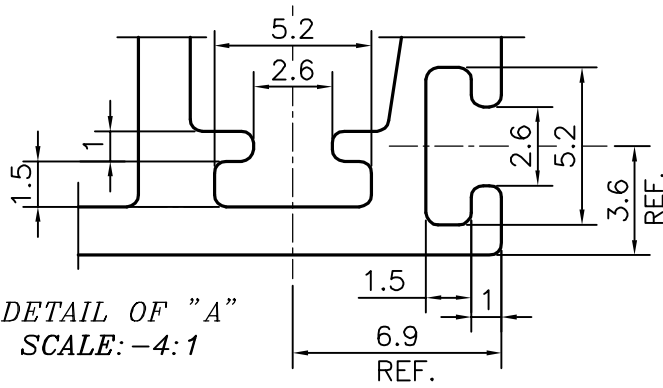

SCALE: - 1:1

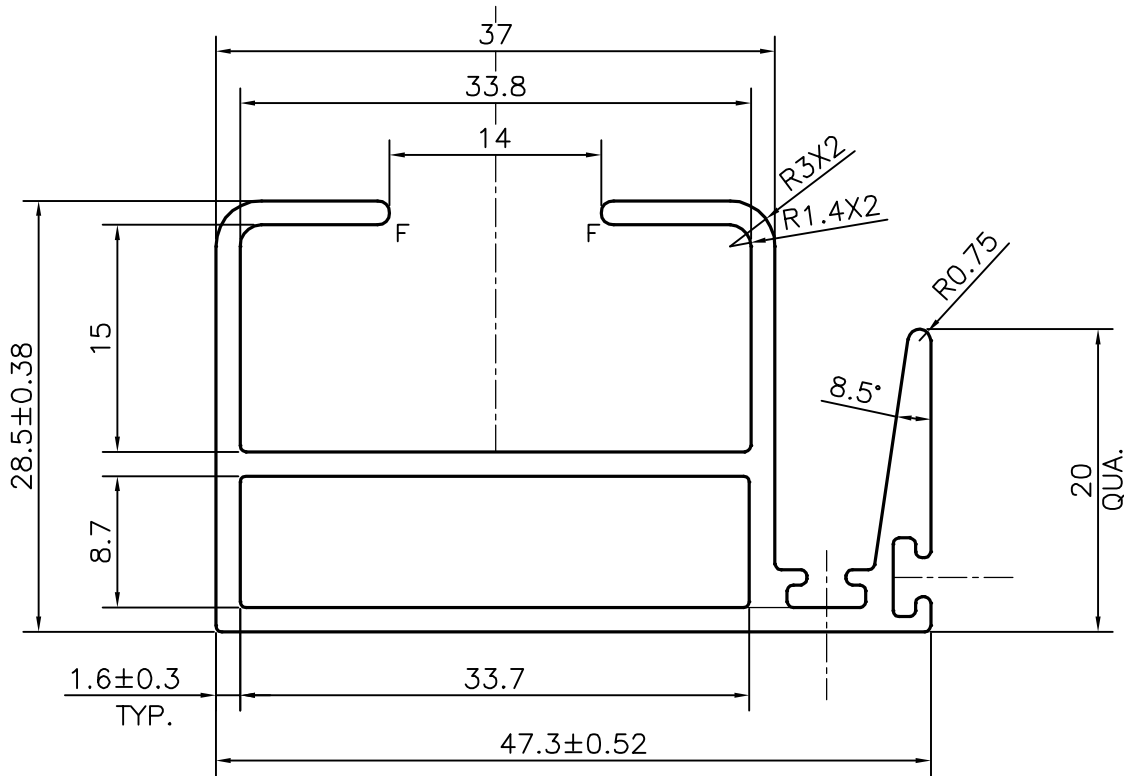

SCALE: - 2:1

FINISH:- PVDF COATING

FINISH:- POWDER COATING

FINISH:- ANODIZING

APPROXIMATE WEIGHT RANGE - 0.638 - 0.932 kg/m

F=FULL RADIUS (2 PLACES)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27	1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. ANGULARITY= ±2° 4. FLATNESS =0.006xWIDTH
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40	
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52	
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00		
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14		



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	PUNITH	11-10-2021
CHECKED		
APPROVED	B.NATARAJA	20-10-2021
SCALE		2:1
AREA mm ²		290.851
PERIMETER mm.		264.977
WEIGHT kg/m		0.785
DRAWING No.	SECTION No.	
P-23018-1	-	
X3019	X3019	

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	RIDDHI SIDDHI INNOVATIONS (INDIA) PVT, LTD.
PARTY'S DRAWING No.	AS PER AUTOCAD DRAWING
ALLOY & TEMPER	6063 T6
DESCRIPTION	INTERLOCK SECTION