
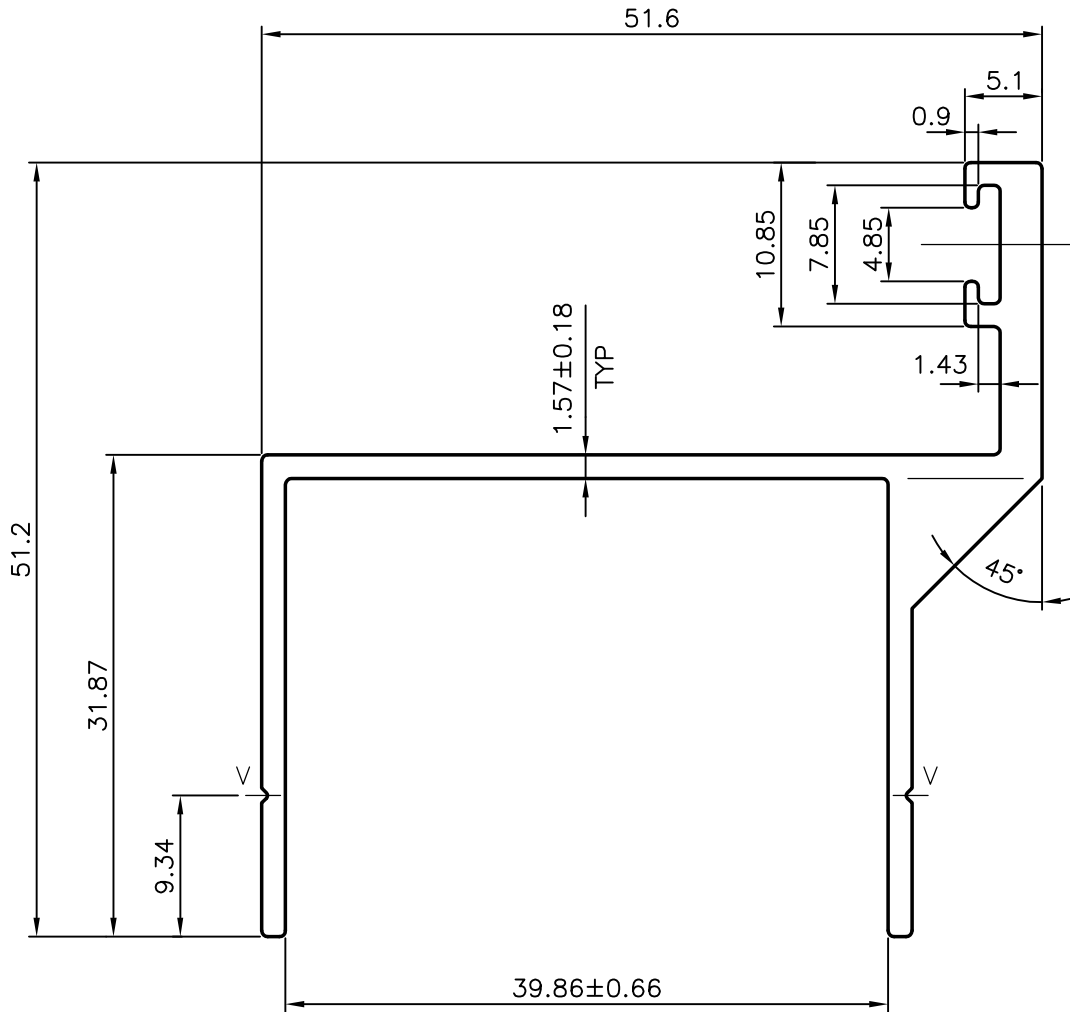


P-6141

X550

EXPOSED SURFACE —
BETTER FINISH REQUIRED

GENERAL WALL THICKNESS = 1.57 ± 0.18 mm
V = VEE GROOVE $0.38 \times 90^\circ \times R0.25$ (2 PLACES)

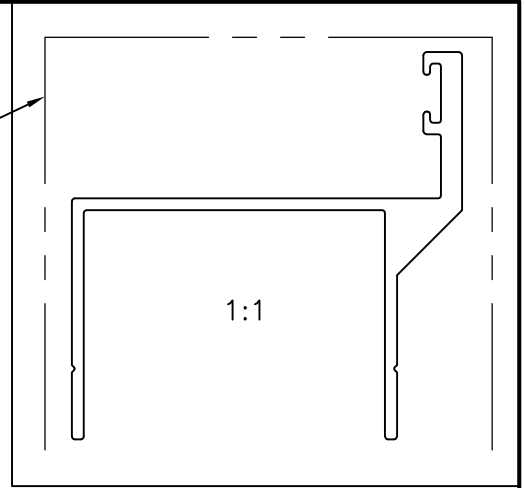

SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

| | NAME | DATE |
|----------|------------|------------|
| DRAWN | MALINGAPPA | 17-01-2006 |
| CHECKED | | |
| APPROVED | | |

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER COMMERCIAL UNLESS OTHERWISE SPECIFIED

| | |
|----------------------|---------|
| SCALE | 2:1 |
| AREA mm ² | 275.79 |
| PERIMETER mm. | 273.635 |
| WEIGHT kg/m | 0.745 |

| | |
|---------------------|----------------------------------|
| PARTY'S NAME | PROSOURCE SOLUTIONS INC., CANADA |
| PARTY'S DRAWING No. | WS-9239 |
| ALLOY & TEMPER | 6063 T5 |
| DESCRIPTION | DOOR FRAME |

| DRAWING No. | SECTION No. |
|-------------|-------------|
| P-6141 | - |
| X550 | X550 |
| | |
| | |