
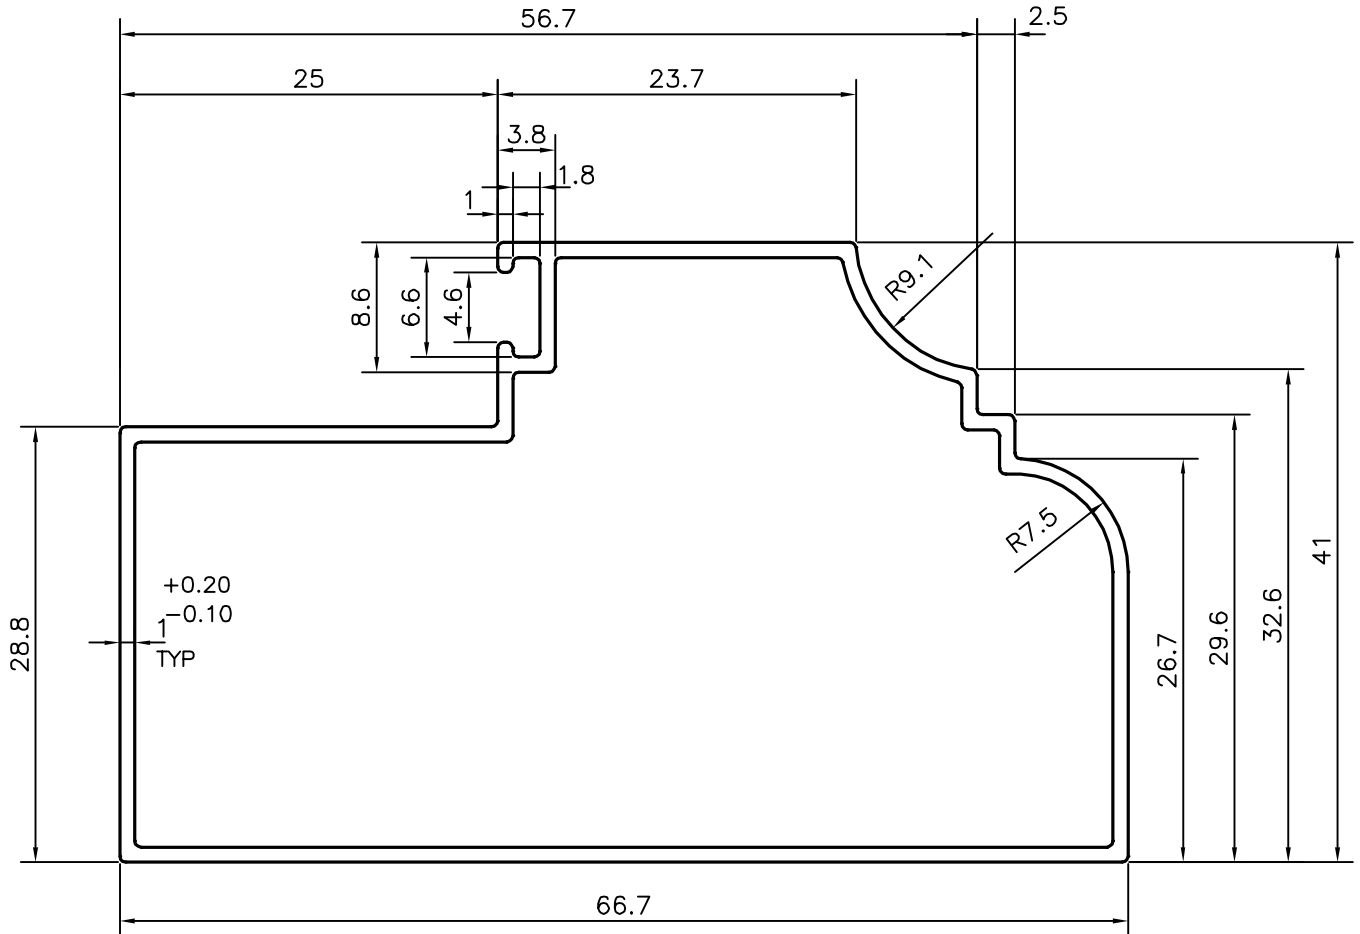


P-21267

E1365

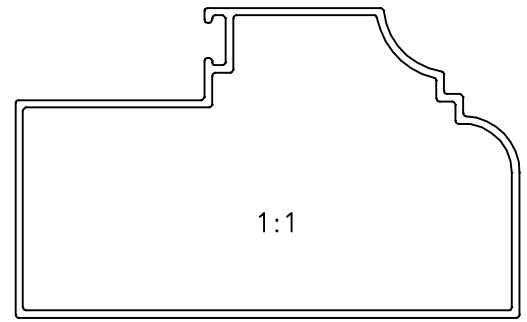

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm	- ±0.30
UPTO 30.0mm	- ±0.38
UPTO 40.0mm	- ±0.45
UPTO 50.0mm	- ±0.52
UPTO 60.0mm	- ±0.60

UPTO 80.0mm	- ±0.70
UPTO 100.0mm	- ±0.80
UPTO 120.0mm	- ±0.90
UPTO 140.0mm	- ±1.00
UPTO 160.0mm	- ±1.14

UPTO 180.0mm	- ±1.27
UPTO 200.0mm	- ±1.40
UPTO 225.0mm	- ±1.52

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.006xWIDTH



SYMBOL OF QUALITY  
AN ISO 9001 COMPANY

**JINDAL ALUMINIUM LTD.**  
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	06-08-2020
CHECKED		
APPROVED	J.N.RAI	25-08-2020

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:6477-1983 , UNLESS OTHERWISE SPECIFIED

SCALE	2:1
AREA mm <sup>2</sup>	209.263
PERIMETER mm.	214.95
WEIGHT kg/m	0.565

PARTY'S NAME	ALUMENTICA TRADING PVT. LTD., PATNA
PARTY'S DRAWING No.	AS PER DRAWING
ALLOY & TEMPER	6063 T6
DESCRIPTION	DOOR SECTION

DRAWING No.	SECTION No.
P-21267	-
E1365	E1365