

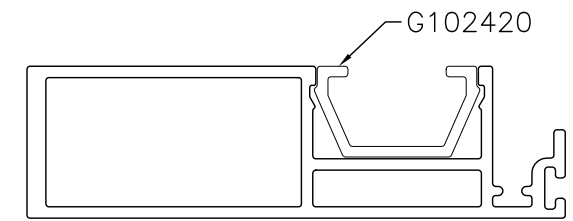


P-JAL-B-560

X102421



SCALE 1:1

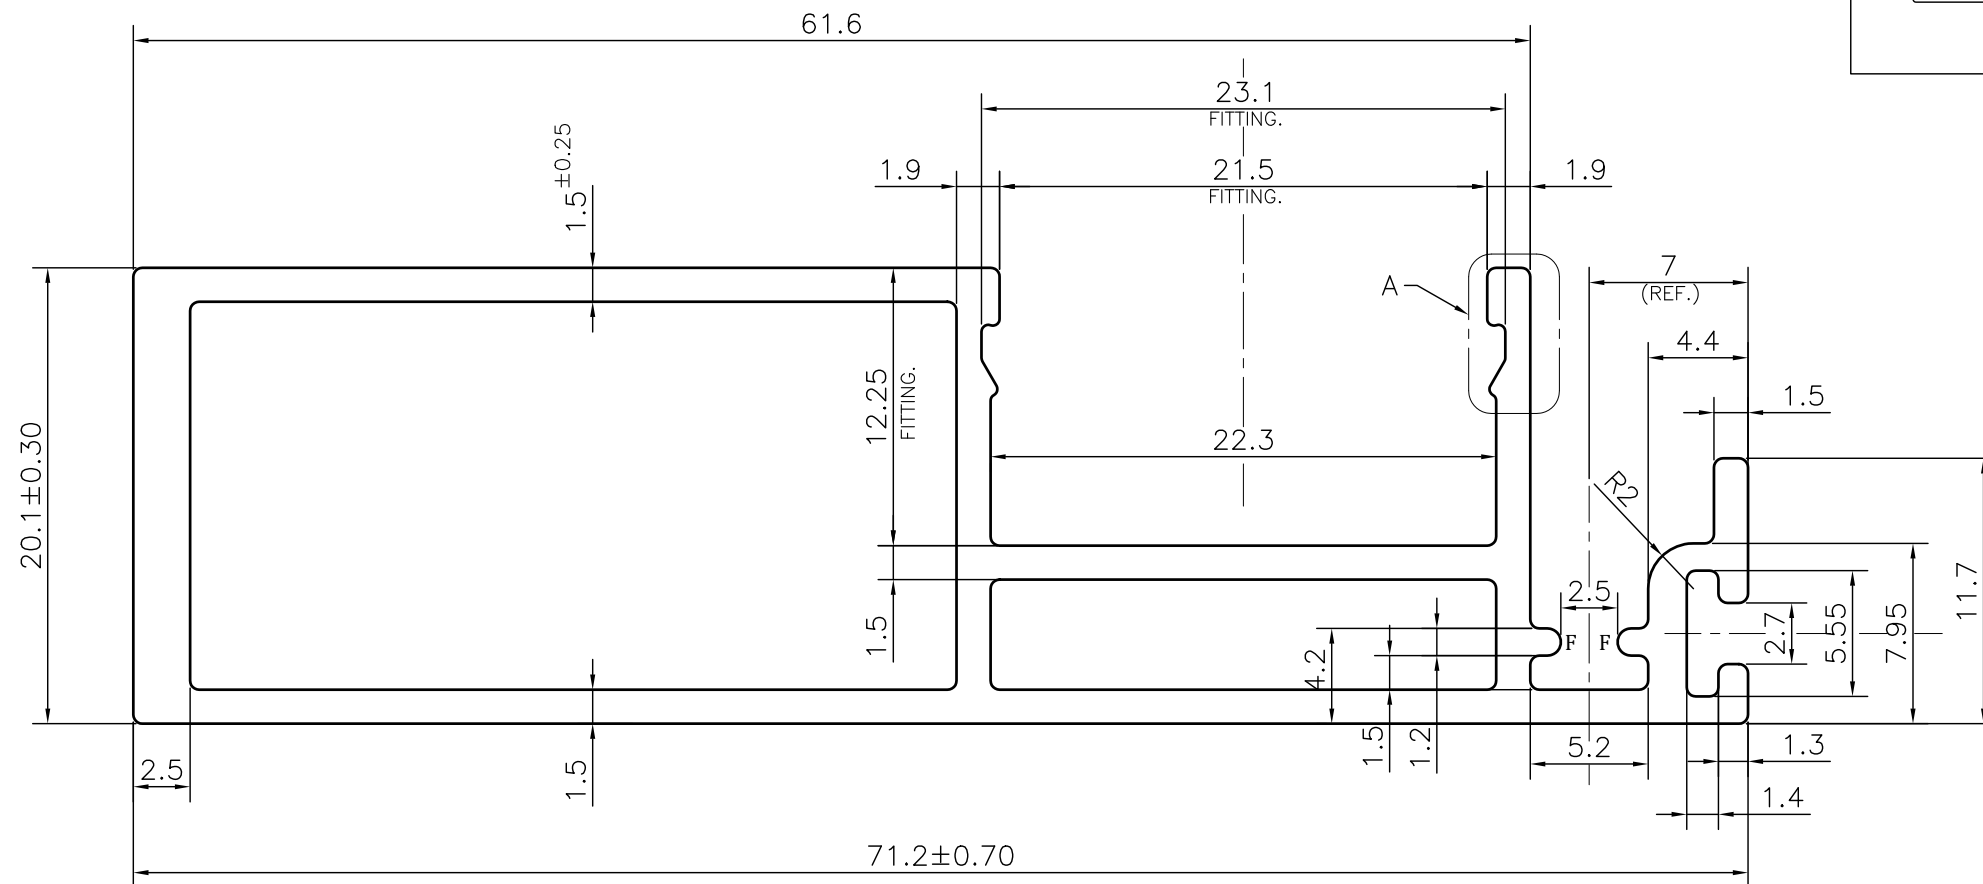

DETAIL A  
SCALE 3:1

**NOTE:-**  
**F= FULL RADIUS (2 PLACES)**  
**\*= 0.30 RADIUS (8 PLACES)**


TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD ≤ 100	100 < CD ≤ 200	200 < CD ≤ 300	300 < CD ≤ 500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 - 25.0	±0.30	±0.40	±0.50	±0.60
25.0 - 50.0	±0.50	±0.60	±0.80	±0.90
50.0 - 100	±0.70	±0.90	±1.10	±1.30
100 - 150	-	±1.10	±1.30	±1.50
150 - 200	-	±1.3	±1.50	±1.80
200 - 300	-	-	±1.70	±2.10
300 - 450	-	-	-	±2.80

Q01833

CONTROLLED COPY

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	<b>JINDAL ALUMINIUM LTD.</b> BHIWADI-301019 (INDIA)		NAME	DATE	
			DRAWN	ASHUTOSH	30-05-2024
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED			CHECKED	PARVESH	02-07-2024
			APPROVED	N.K.HOLEY	03-07-2024
PARTY'S NAME WINDOOR TECH, GURUGRAM			SCALE		3:1
			AREA mm <sup>2</sup>		319.246
PARTY'S DRAWING No. AS PER DRAWING (AS PER CUSTOMER REQUIREMENT)			PERIMETER mm.		240.359
			WEIGHT kg/m		0.862
ALLOY & TEMPER 6063 T6			DRAWING No.		SECTION No.
			P-JAL-B-560		7000002602
DESCRIPTION WINDOW SECTION-BIG INTERLOCK-25 MM SERIES			X102421		X102421
			PRODUCT CODE:-048		
			HSN CODE:- 76042100		