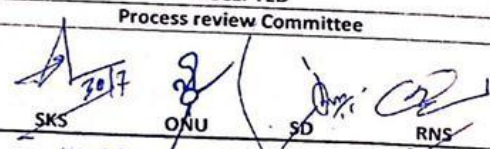



## TECHNICAL DATA SHEET

	TDS No.	Date : 30/07/2021
1	NAME OF CUSTOMER :	JASKIRAN UDYOG
2	PRODUCT	ALUMINIUM SHEET
3	END APPLICATION	Solar Component [Draw Quality]
4	PRODUCT SPECIFICATIONS	0.8 mm x 529/540 mm (width) x 377/407 mm (Length)
5	ALLOY	AA 1100 <span style="float: right;">380/410</span>
6	TEMPER	O
7	CHEMICAL COMPOSITION	As per IS 737:2008
8	TOLERANCES	
a)	THICKNESS TOLERANCE (mm)	+/- 0.02 mm ✓
b)	WIDTH TOLERANCE (mm)	+/- 1 mm ✓
c)	LENGTH TOLERANCE (mm)	+/- 2 mm ✓
9	ANODIZING	NO
10	POWDER COATING/PAINTING	NO
11	TENSILE STRENGTH	75 - 110 MPa
12	Elongation(%)	Minimum 14%
13	Electrical Conductivity (% IACS at 20°C)	Not Applicable
14	Bending	90° pass
15	Surface Finish	Free of any surface defects
16	Edges	Trimmed
17	Packing Requirements	Standard sheet HDPE + pallet packing [Both Side MDF Sheet]
	For _____	ACCEPTED Process review Committee
	Name & Designation of Customer Rep.	

For JASKIRAN UDYOG  
 PARTNER

**JINDAL ALUMINIUM LIMITED**  
 (Rolling Mill Division)  
 K. I. A. D. B. Industrial Area  
 Yedahalli Village, Tumkur Road  
 Dabbaspet, Bengaluru-562 111  
 Ph: 080-27735051-27735052