



P-JAL-B-329

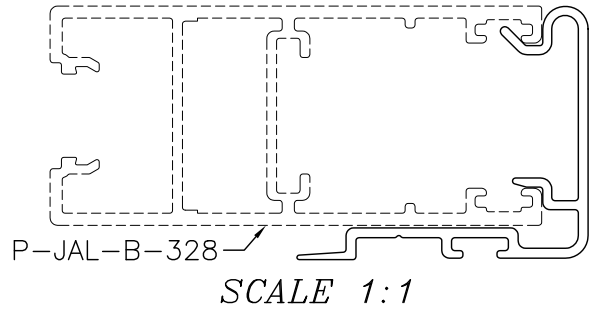

Q00929

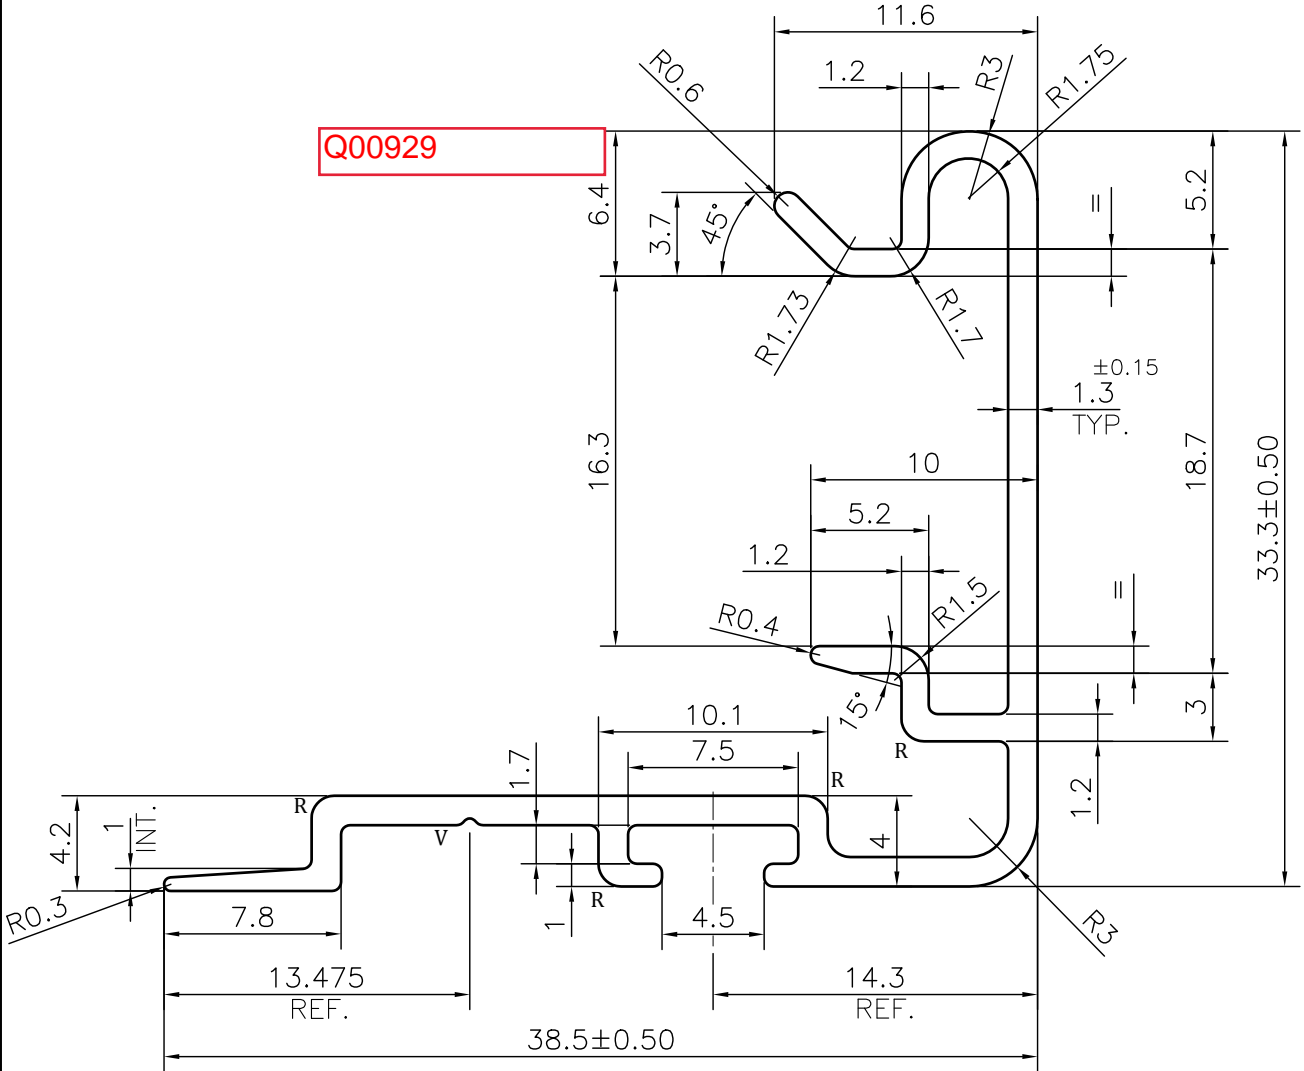

**NOTE:-**

**R= 1.0 RADIUS (4 PLACES)**  
**V= 0.3x90° V-GROOVE (1 PLACE)**

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH

QXXXXX

UNCONTROLLED COPY

1) THE WELDING LINE IN THE EXPOSED SURFACE OF PROFILE IS UNAVOIDABLE. 2) PLEASE SPECIFY IMPORTANT SIZES. 3) PLEASE SPECIFY IF THIS PROFILE MATCHES WITH OTHER PROFILES. 4) PLEASE SPECIFY EXPOSED SURFACE. OTHER WISE CONSIDERED AS NO EXPOSED SURFACE. 5) FINISH :- MILL FINISH / ANODIZING / POWDER COATING



SYMBOL OF QUALITY  
AN ISO 9001 COMPANY

**JINDAL ALUMINIUM LTD.**  
**BHIWADI-301019 (INDIA)**

	NAME	DATE
DRAWN	ASHUTOSH	06-09-2023
CHECKED		
APPROVED		
SCALE		3:1
AREA mm <sup>2</sup>		129.716
PERIMETER mm.		208.41
WEIGHT kg/m		0.350
DRAWING No.	SECTION No.	
P-JAL-B-329	-	
-	-	

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	SAY METAL LLP, GURGAON	
PARTY'S DRAWING No.	AS PER DRAWING	
ALLOY & TEMPER	6063 T6	PRODUCT CODE:-044
		HSN CODE:- 76042990
DESCRIPTION	GLAZING CLIP SECTION	