



P-12681
S3724
12242

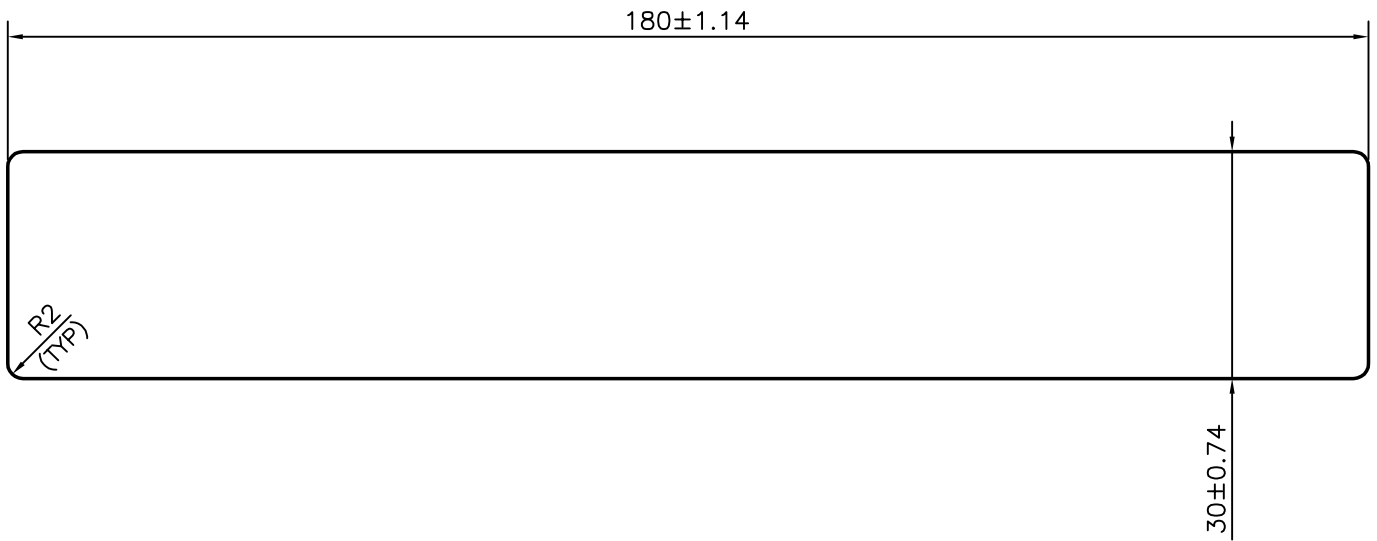

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	DRAWN	NAME	DATE
		CHECKED		
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED		APPROVED	S.S.GARG	29-04-2013
		SCALE		1:1
PARTY'S NAME NARMADA SWITCHGEAR PVT. LTD., BHOPAL		AREA mm ²		5396.566
		PERIMETER mm.		416.566
PARTY'S DRAWING No. AS PER SPECIFICATION		WEIGHT kg/m		14.571
		DRAWING No.		SECTION No.
ALLOY & TEMPER 6082 T6		P-12681		-
		S3724		S3724
DESCRIPTION FLAT BAR WITH CORNER RADII 2 mm		12242		12242