



P-16801
S5313
22600

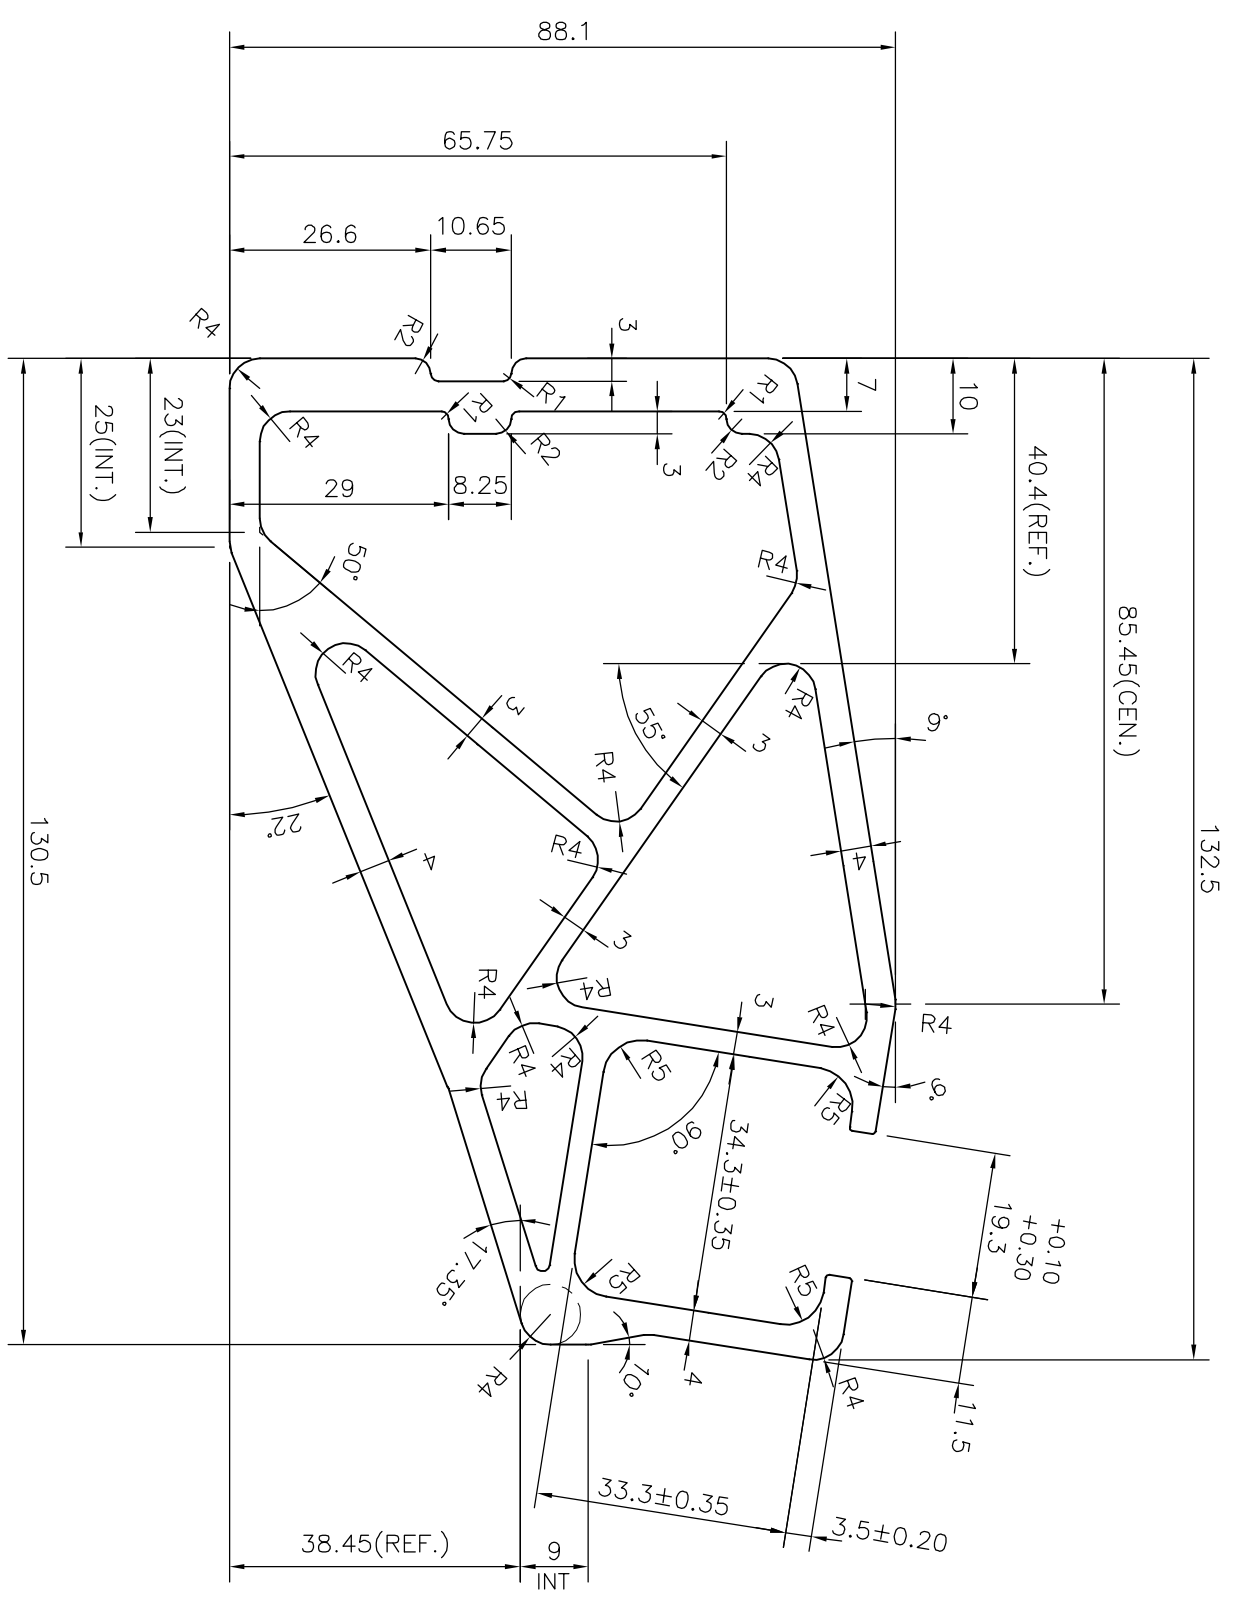

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00	
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14	

1. STRAIGHTNESS=1.7mm/M
2. TWIST=1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS =0.006xWIDTH

 <p><b>JINDAL ALUMINIUM LTD.</b> BANGALORE-560073 (INDIA)</p>		<p>1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED</p>
<p>SYMBOL OF QUALITY AN ISO 9001 COMPANY</p>		<p>NAME: J.P.KAUSHIK DATE: 04-02-2017</p>
<p>PARTY'S NAME SIEGER SPINTECH EQUIPMENT PVT. LTD., COIMBATORE</p>		<p>CHECKED: [ ] APPROVED: B.NATARAU DATE: 27-02-2017</p>
<p>PARTY'S DRAWING No. AS PER DRAWING MVLX1001SEOXX01B</p>		<p>SCALE: 1:1</p>
<p>ALLOY &amp; TEMPER 6063 T6</p>		<p>AREA mm<sup>2</sup>: 2408.836</p>
<p>DESCRIPTION SLIDING BKT-OUTER SECTION</p>		<p>PERIMETER mm.: 480.91</p>
		<p>WEIGHT kg/m: 6.504</p>
		<p>DRAWING No.: [ ] SECTION No.: [ ]</p>