



P-17733-1

S5635

25393

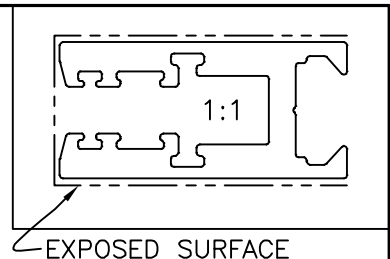

EXPOSED SURFACE

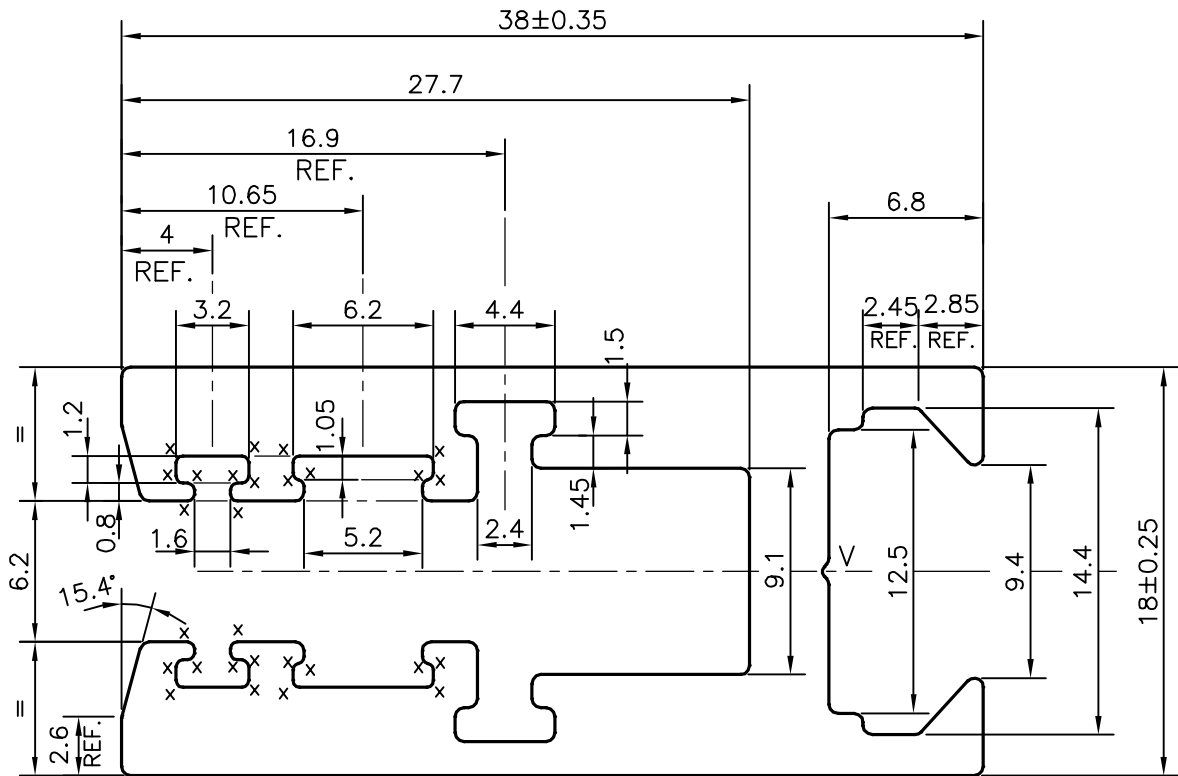

X = RADIUS 0.3mm. (28 PLACES)  
 V = V GROOVE 0.3x90°(ONE PLACE)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27	1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. ANGULARITY= ±2° 4. FLATNESS =0.006xWIDTH
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40	
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52	
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00		
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14		



SYMBOL OF QUALITY  
AN ISO 9001 COMPANY

**JINDAL ALUMINIUM LTD.**  
 BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	03-01-2018
CHECKED		
APPROVED	B.NATARAJA	05-01-2018

- ALL DIMENSIONS ARE IN mm.
- ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
- TOLERANCES WILL BE AS PER,IS:3965-1981 UNLESS OTHERWISE SPECIFIED

SCALE	3:1
AREA mm <sup>2</sup>	334.317
PERIMETER mm.	229.156
WEIGHT kg/m	0.903

PARTY'S NAME	DISHA RETAIL FIXTURES PVT. LTD., BANGALORE	DRAWING No.	P-17733-1	SECTION No.	-
PARTY'S DRAWING No.	AS PER DRAWING & S5034		S5635		S5635
ALLOY & TEMPER	6063 T6		25393		25393
DESCRIPTION	ELECTRICAL SECTION				