


P-16824
S5306
36100

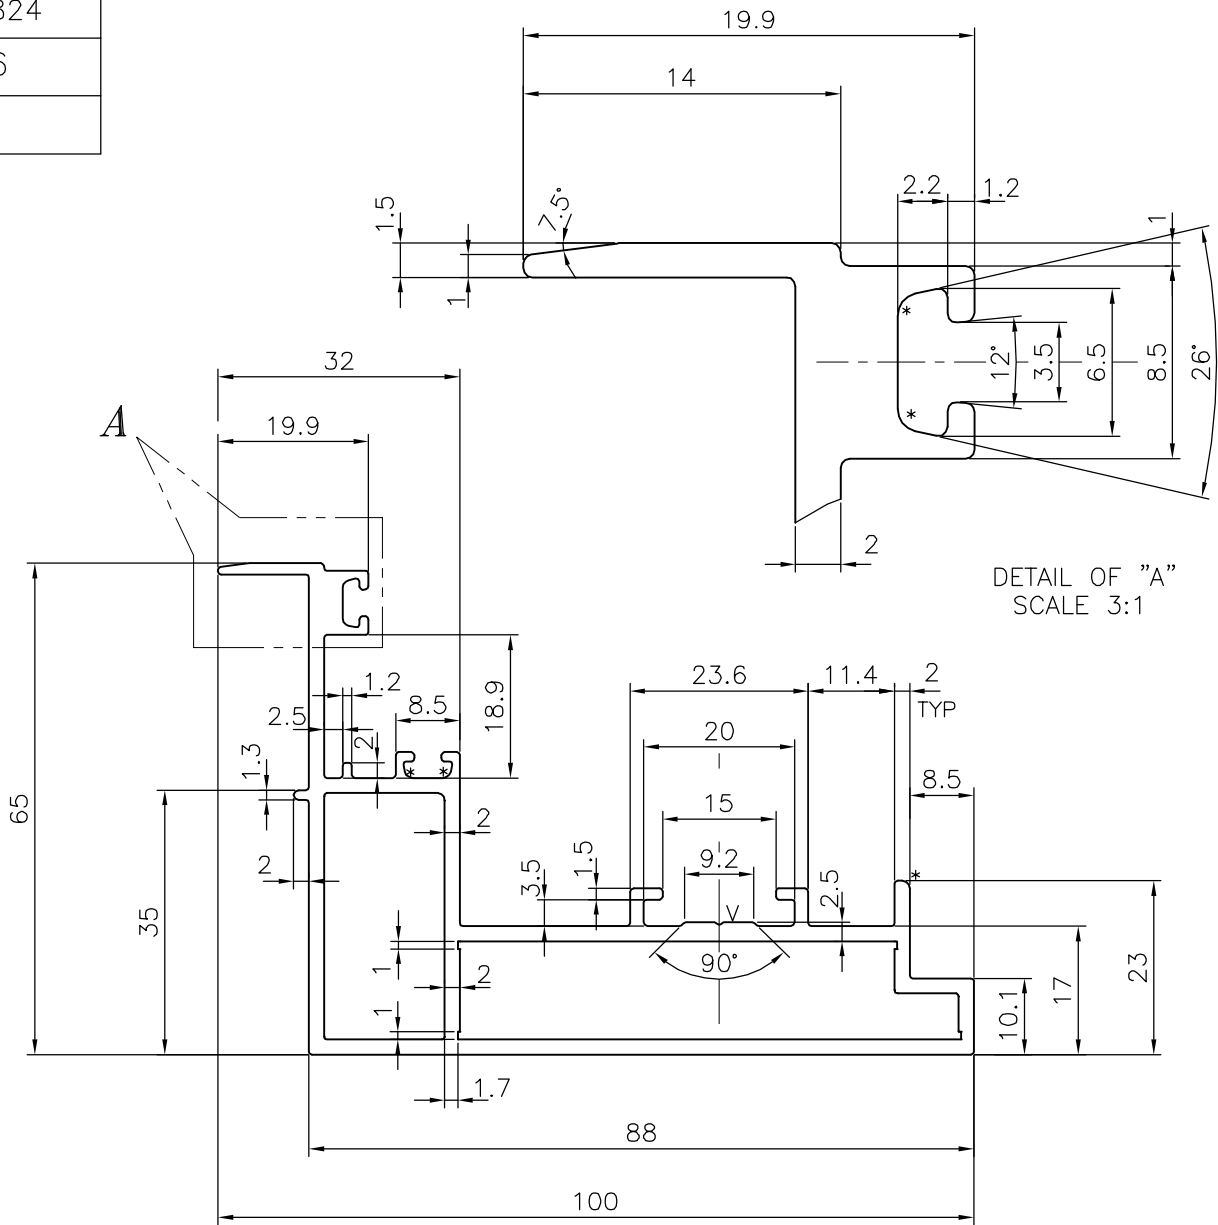


DETAIL OF "A"
SCALE 3:1

* = 1.0 RADIUS (4 PLACES)

V = V GROOVE 0.30x90°(ONE PLACES)

TOLERANCES ON OVERALL DIMENSIONS OF HOLLOW SECTIONS

UPTO 20.0mm - ±0.30	UPTO 80.0mm - ±0.70	UPTO 180.0mm - ±1.27	1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. ANGULARITY= ±2° 4. FLATNESS =0.006xWIDTH
UPTO 30.0mm - ±0.38	UPTO 100.0mm - ±0.80	UPTO 200.0mm - ±1.40	
UPTO 40.0mm - ±0.45	UPTO 120.0mm - ±0.90	UPTO 225.0mm - ±1.52	
UPTO 50.0mm - ±0.52	UPTO 140.0mm - ±1.00		
UPTO 60.0mm - ±0.60	UPTO 160.0mm - ±1.14		

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)	DRAWN	J.P.KAUSHIK	DATE	18-02-2017
		CHECKED			
1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:6477-1983 UNLESS OTHERWISE SPECIFIED		APPROVED	B.NATARAJ		22-02-2017
		SCALE			1:1
PARTY'S NAME HATIM GLAZING & CLADDING PVT. LTD., MUMBAI		AREA	mm ²		671.664
		PERIMETER	mm.		412.111
PARTY'S DRAWING No. AS PER AutoCAD DRAWING		WEIGHT	kg/m		1.813
		DRAWING No.		SECTION No.	
ALLOY & TEMPER 6063 T6		P-16824		-	
		S5306		S5306	
DESCRIPTION CURTAIN WALL SECTION		36100		36100	