

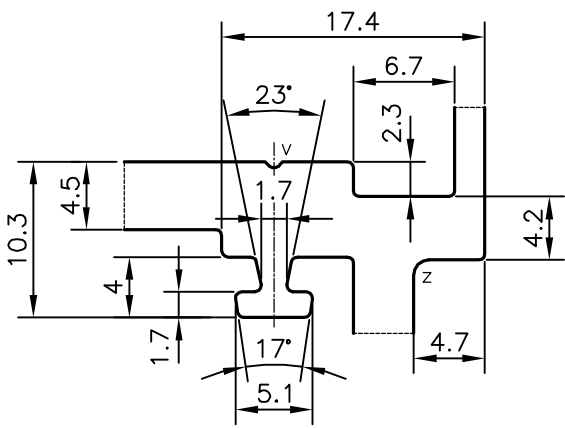


P-14720

E0323

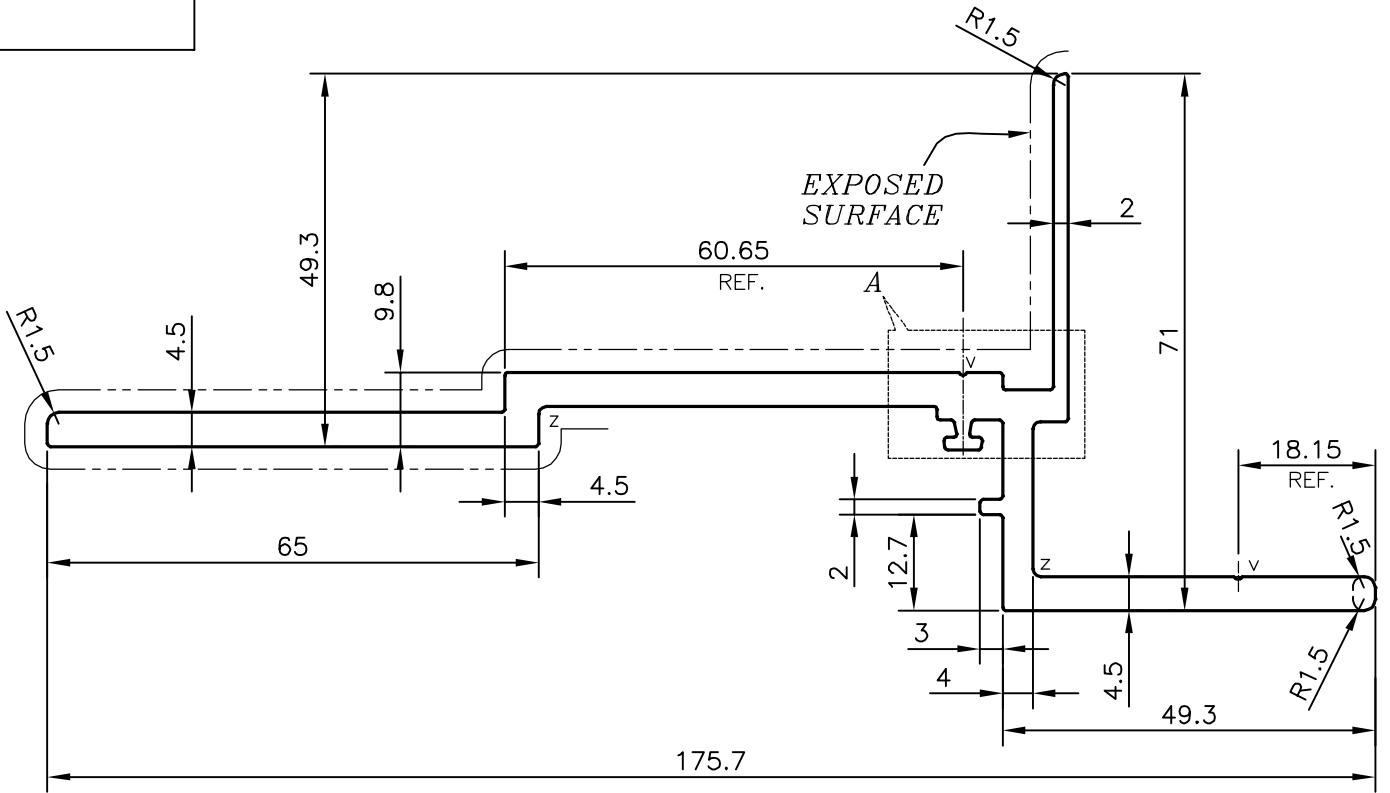

DETAIL OF "A"
SCALE 3:1

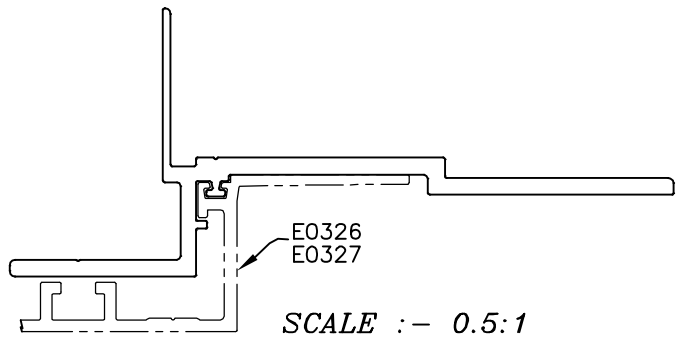


SCALE :- 0.5:1

Z = RADIUS 1 mm. (3 PLACES)
V = VEE GROOVE 0.4x90° (2 PLACES)

ANGULARITY TOLERANCE = ±1°
TRY TO MAINTAIN AS CLOSER ±0.75

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

| | | | |
|---------------------|----------------------|----------------------|---|
| UPTO 6.40mm - ±0.20 | UPTO 32.0mm - ±0.38 | UPTO 120.0mm - ±0.85 | 1. STRAIGHTNESS=1.7mm/M 2. TWIST=1.7mm/M 3. FLATNESS =0.003xWIDTH |
| UPTO 10.0mm - ±0.23 | UPTO 50.0mm - ±0.46 | UPTO 160.0mm - ±1.02 | |
| UPTO 12.0mm - ±0.25 | UPTO 60.0mm - ±0.53 | UPTO 200.0mm - ±1.14 | |
| UPTO 16.0mm - ±0.28 | UPTO 80.0mm - ±0.69 | UPTO 250.0mm - ±1.40 | |
| UPTO 25.0mm - ±0.30 | UPTO 100.0mm - ±0.75 | UPTO 300.0mm - ±1.65 | |

| | | | | |
|--|--|--|-------------|------------|
|  SYMBOL OF QUALITY AN ISO 9001 COMPANY | JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA) | DRAWN | NAME | DATE |
| | | CHECKED | PARVESH | 08-06-2015 |
| 1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 , UNLESS OTHERWISE SPECIFIED | | APPROVED | B.NATARAJA | 17-07-2015 |
| | | SCALE | | 1:1 |
| PARTY'S NAME | | AREA mm ² | | 1049.375 |
| | | PERIMETER mm. | | 530.441 |
| PARTY'S DRAWING No. | | WEIGHT kg/m | | 2.833 |
| | | DRAWING No. | SECTION No. | |
| ALLOY & TEMPER | | P-14720 | - | |
| | | E0323 | E0323 | |
| DESCRIPTION | | CURTAIN WALL SECTION-SUNSHADE BRACKET (MALE)-1 | | |