



P-18599

E0945

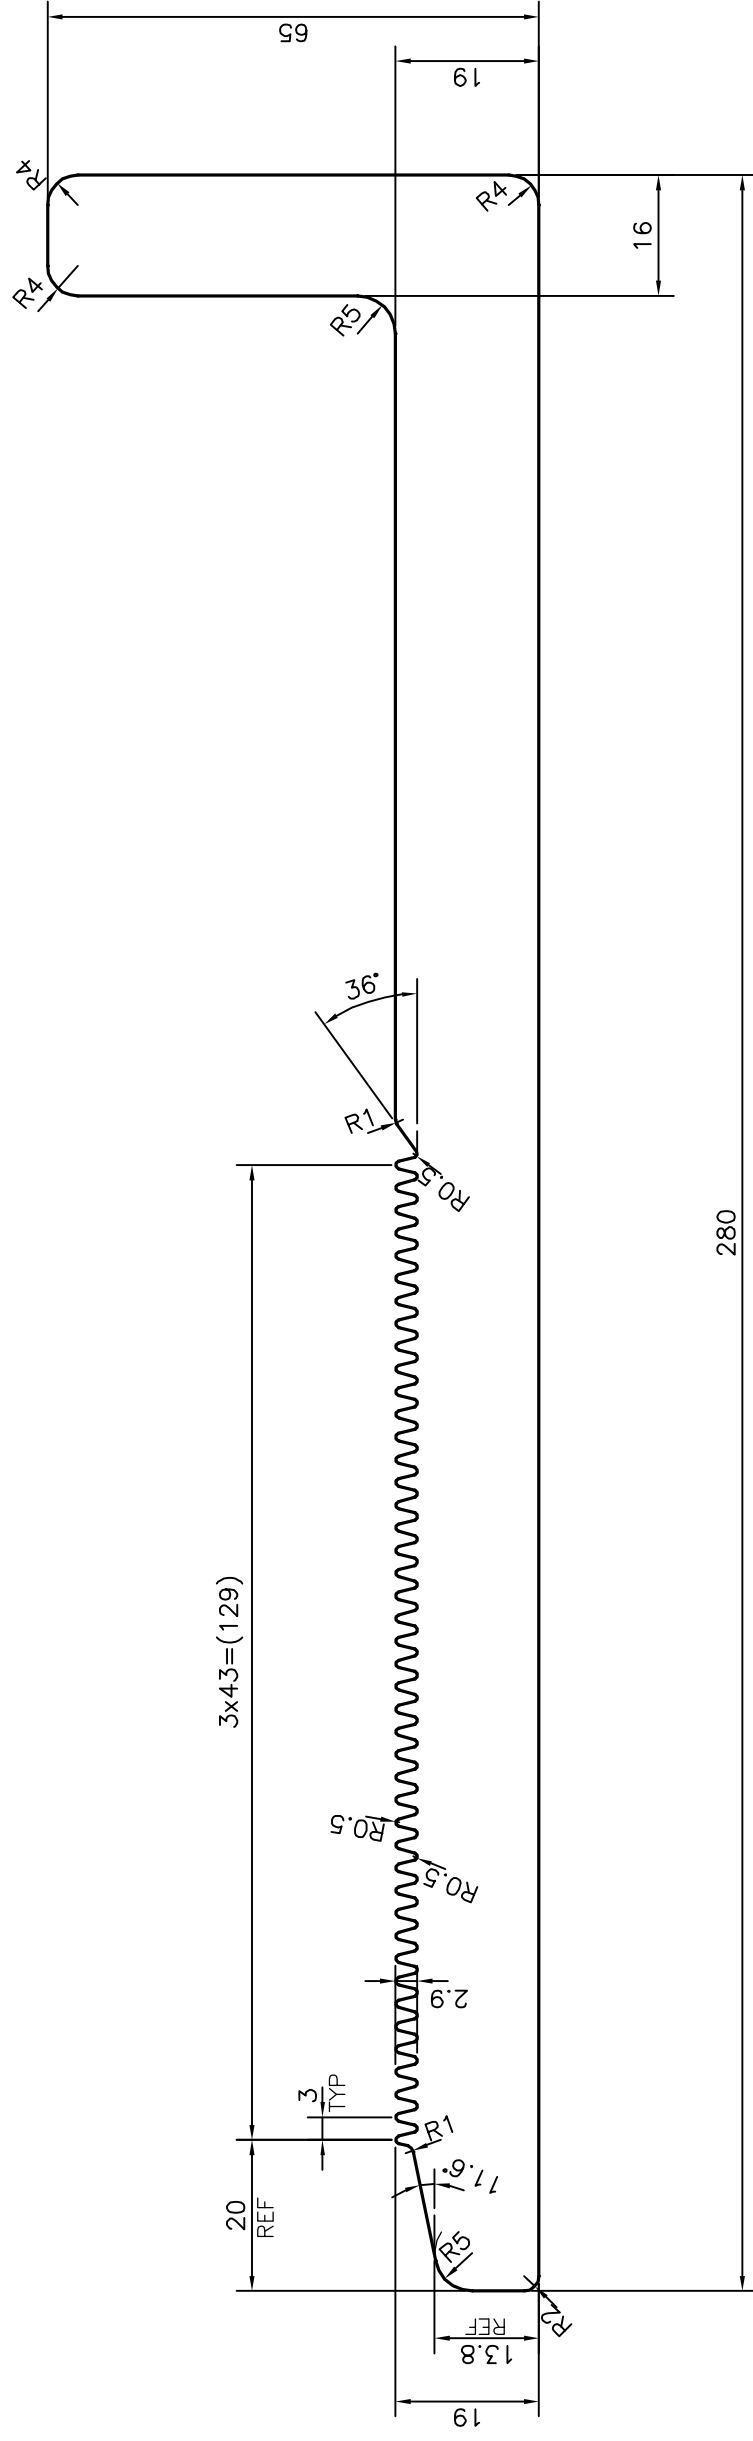

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	1. STRAIGHTNESS=1.0mm/M
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	2. TWIST=1.0mm/M
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	3. ANGULARITY= ±1°
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	4. FLATNESS =0.007xWIDTH
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		DRAWN J.P.KAUSHIK 24-08-2018
	1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 UNLESS OTHERWISE SPECIFIED		CHECKED APPROVED B.NATARAJA 01-09-2018
PARTY'S NAME ALUFIT (INDIA) PVT. LTD., BANGALORE		SCALE 1:1	
PARTY'S DRAWING No. PROFILE-T1/T2-26		AREA mm ² 5771.457	
ALLOY & TEMPER 6005 T6		PERIMETER mm. 854.053	
DESCRIPTION FLOOR BRACKET SECTION		WEIGHT kg/m 15.583	
		DRAWING No. SECTION No.	
		P-18599 -	
		E0945 E0945	