
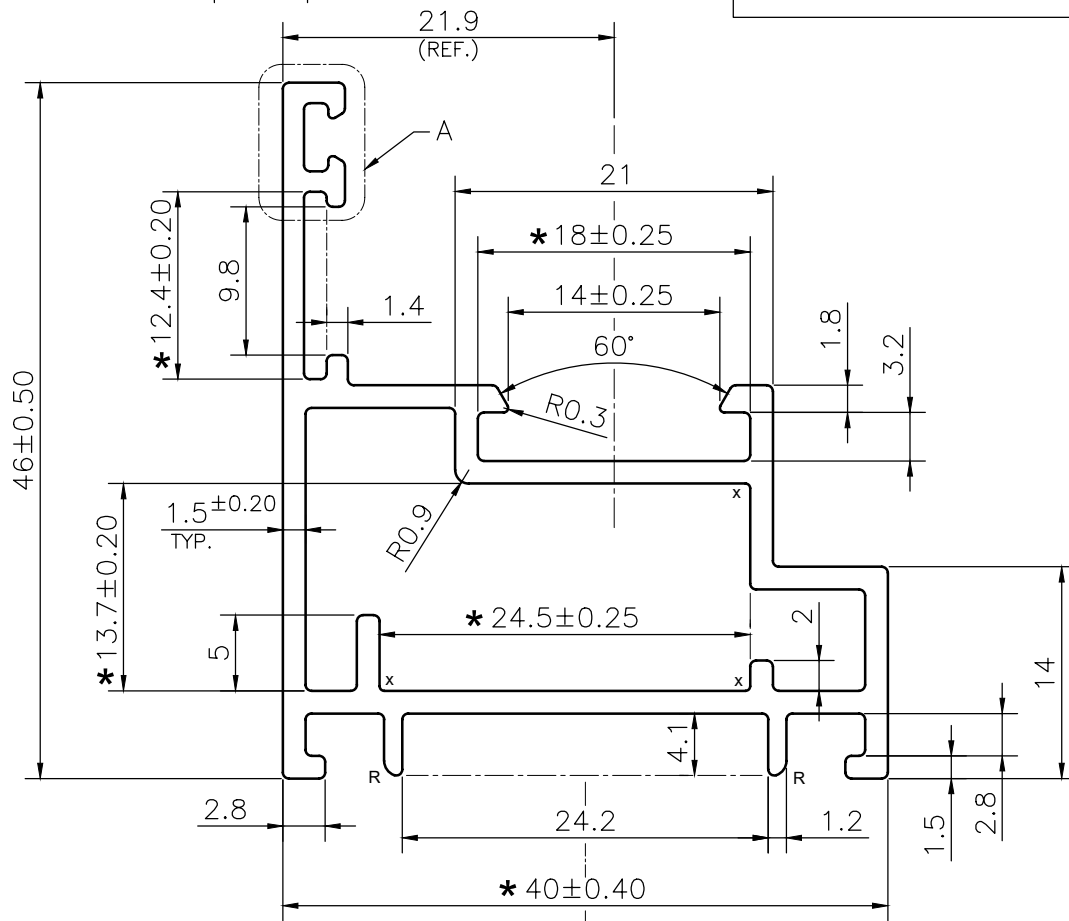
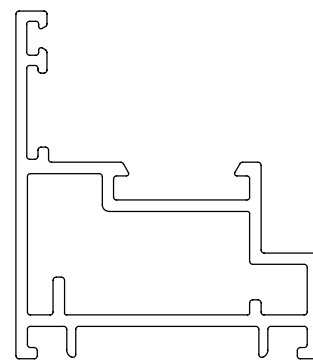


P-JAL-B-1028-1

E103871

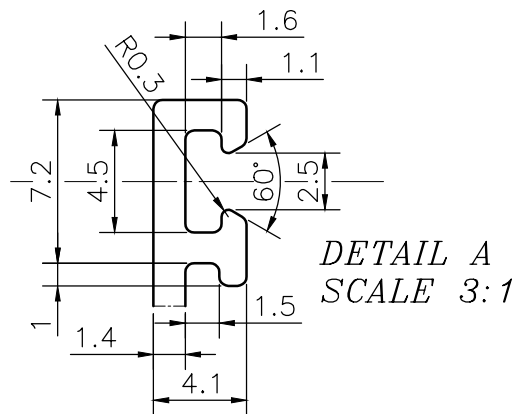

NOTE:-

*= CRITICAL DIMENSIONS

x= 0.30 RADIUS (3 PLACES)

R= 1.0 RADIUS (2 PLACES)

1. STRAIGHTNESS= 1.0mm/M
2. TWIST= 1.0mm/M
3. ANGULARITY= $\pm 2^\circ$
4. FLATNESS= 0.007xWIDTH

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD≤100	100<CD≤200	200<CD≤300	300<CD≤500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 -25.0	±0.30	±0.40	±0.50	±0.60
25.0 -50.0	±0.50	±0.60	±0.80	±0.90
50.0 -100	±0.70	±0.90	±1.10	±1.30
100 - 150	-	±1.10	±1.30	±1.50
150 - 200	-	±1.3	±1.50	±1.80
200 - 300	-	-	±1.70	±2.10
300 - 450	-	-	-	±2.80

Q03231

CONTROLLED COPY



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BHIWADI-301019 (INDIA)

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9, UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	BHARAT POLYZONE PVT. LTD, DELHI	DRAWN	ASHUTOSH	DATE	18-04-2025
PARTY'S DRAWING No.	AS PER CAD DRAWING-A40CF001	CHECKED	PARVESH		07-05-2025
ALLOY & TEMPER	6063 T6	APPROVED	R.G.P.		07-05-2025
DESCRIPTION	WINDOW SECTION-OUTER FRAME	SCALE			2:1
		AREA mm ²			268.24
		PERIMETER mm.			230.368
		WEIGHT kg/m			0.724
		DRAWING No.		SECTION No.	
		P-JAL-B-1028-1		7000004160	
		E103871		E103871	

PRODUCT CODE:-048
HSN CODE:- 76042100