P–20050–3
E1237

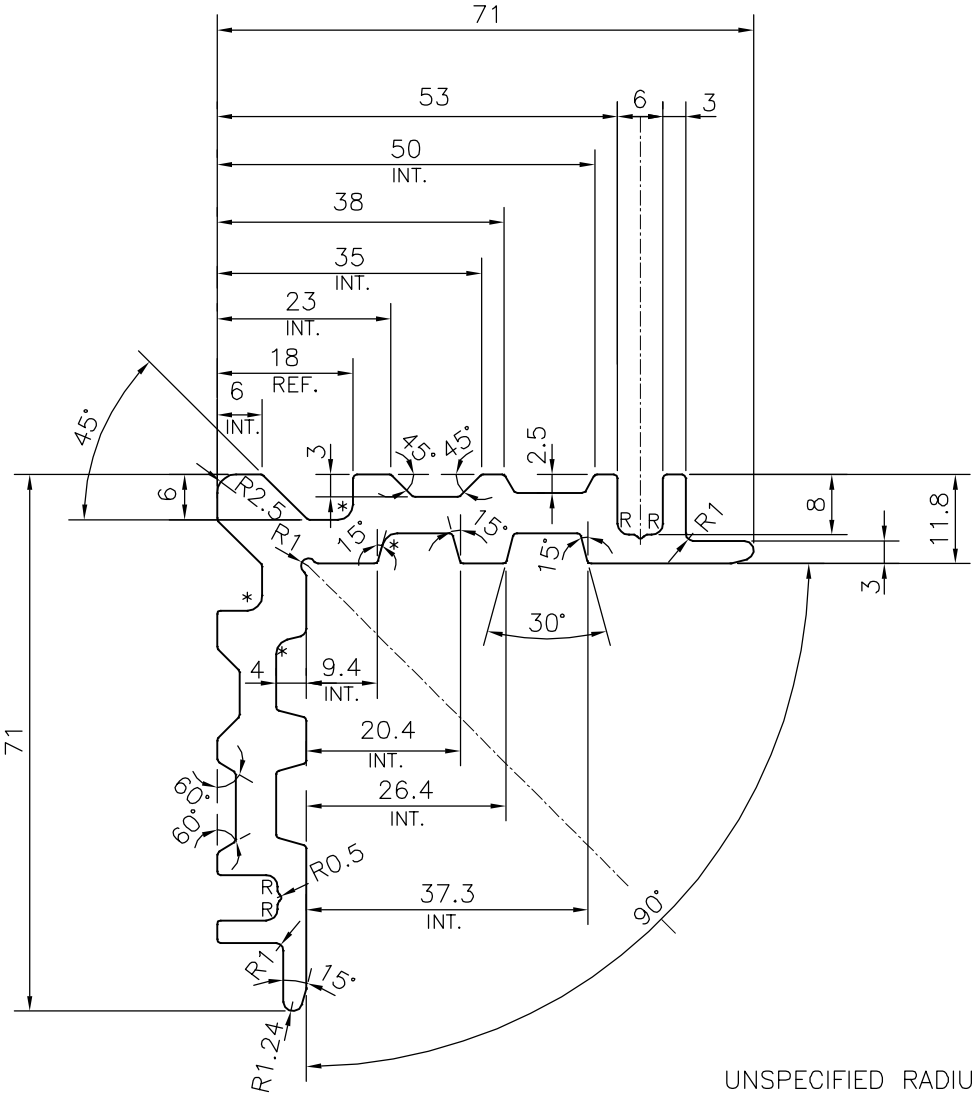

UNSPECIFIED RADIUS 0.5 mm

* = R2 (2 PLACES)

R = R1.5 (4 PLACES)

PLEASE CONFIRM ALL THE DIMENSIONS
AND MATCH WITH YOUR MATCHING COMPONENT

DIMENSION		TOLERANCES	TOLERANCES (OPEN ENDS)	
OVER	UP TO AND INCLUDING	(EXCEPT OPEN ENDS)	E≤60	60<E≤120[a]
–	10	±0.15	±0.15	–
10	15	±0.20	±0.20	–
15	30	±0.25	±0.25	–
30	45	±0.30	±0.30	±0.45
45	60	±0.40	±0.40	±0.55
60	90	±0.45	±0.45	±0.65
90	120	±0.60	±0.60	±0.80
120	150	±0.80	±0.80	±1.0
150	180	±1.0	±1.0	±1.3
180	240	±1.2	±1.2	±1.5
240	300	±1.5	±1.5	±1.8

PLEASE SPECIFY THE EXPOSED SURFACE IN THE DRAWING WHEREVER BETTER FINISH REQUIRED.

JINDAL
SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.

BANGALORE–560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	20–09–2019
CHECKED		
APPROVED	B.NATARAJA	16–11–2019

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN–12020–2 , UNLESS OTHERWISE SPECIFIED

SCALE	1:1
AREA mm^2	906.176
PERIMETER mm.	356.198
WEIGHT kg/m	2.447

PARTY'S NAME	EUROPEAN FACADE PRODUCTS, NETHERLANDS
PARTY'S DRAWING No.	EFP 50 CW/EFP 55 W&D 14.350
ALLOY & TEMPER	6063 T6
DESCRIPTION	CORNER CLEAT 11.8mm

DRAWING No.	SECTION No.
P–20050–3	–
E1237	E1237