P–JAL–B–532
G102347

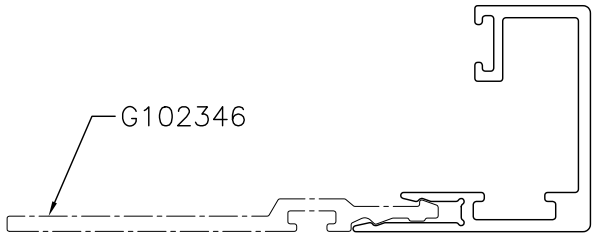

SCALE 1:1



DETAIL A
SCALE 3:1

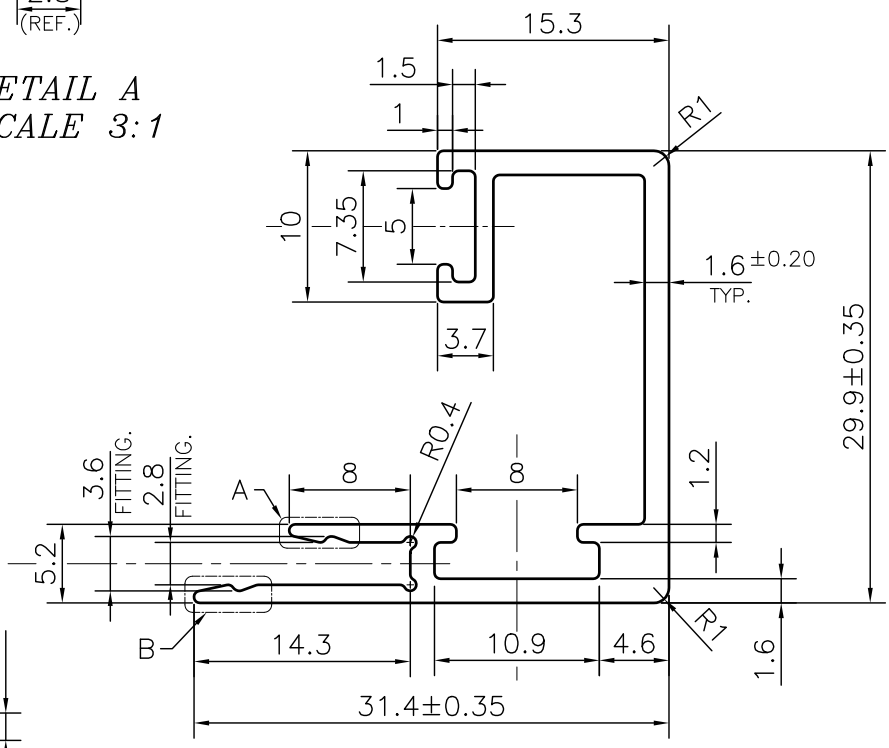



DETAIL B
SCALE 3:1

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD≤100	100<CD≤200	200<CD≤300	300<CD≤500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 –25.0	±0.30	±0.40	±0.50	±0.60
25.0 –50.0	±0.50	±0.60	±0.80	±0.90
50.0 –100	±0.70	±0.90	±1.10	±1.30
100 – 150	–	±1.10	±1.30	±1.50
150 – 200	–	±1.3	±1.50	±1.80
200 – 300	–	–	±1.70	±2.10
300 – 450	–	–	–	±2.80

Q01581

CONTROLLED COPY

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH

JINDAL

SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.

BHIWADI–301019 (INDIA)

	NAME	DATE
DRAWN	ASHUTOSH	18–05–2024
CHECKED	PARVESH	13–06–2024
APPROVED	J.N. RAI	13–06–2024

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN–755–9 , UNLESS OTHERWISE SPECIFIED

SCALE	2:1
AREA mm^2	153.236
PERIMETER mm.	201.71
WEIGHT kg/m	0.414

PARTY'S NAME	AASTHA ALUMINA (P) LIMITED, GURUGRAM
PARTY'S DRAWING No.	AS PER CAD DRAWING–AA–AA13–CP–04
ALLOY & TEMPER	6063 T6 — PRODUCT CODE:–055 — HSN CODE:– 76042990
DESCRIPTION	CURTAIN WALL SECTION–CAPPING PROFILE

DRAWING No.	SECTION No.
P–JAL–B–532	7000002518
G102347	G102347