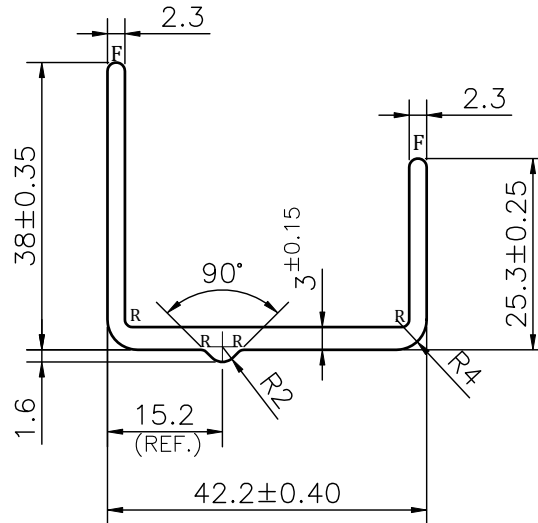


P-JAL-B-821

G103174

**NOTE:-****R= 1.0 RADIUS (4 PLACES)****F= FULL RADIUS (2 PLACES)**

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

DIMENSION	CD≤100	100<CD≤200	200<CD≤300	300<CD≤500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 - 25.0	±0.30	±0.40	±0.50	±0.60
25.0 - 50.0	±0.50	±0.60	±0.80	±0.90
50.0 - 100	±0.70	±0.90	±1.10	±1.30
100 - 150	-	±1.10	±1.30	±1.50
150 - 200	-	±1.3	±1.50	±1.80
200 - 300	-	-	±1.70	±2.10
300 - 450	-	-	-	±2.80

Q02461

CONTROLLED COPY

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= ±2°
4. FLATNESS= 0.007xWIDTH



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BHIWADI-301019 (INDIA)

	NAME	DATE
DRAWN	ASHUTOSH	13-11-2024
CHECKED	ASHUTOSH	29-11-2024
APPROVED	J.N.RAI	29-11-2024

SCALE	1:1
AREA mm ²	255.899
PERIMETER mm.	199.8
WEIGHT kg/m	0.691

DRAWING No.	SECTION No.
P-JAL-B-821	7000003367
G103174	G103174

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED

PARTY'S NAME	R.V INDUSTRIES, GHAZIABAD
PARTY'S DRAWING No.	AS PER CAD DRAWING-47162
ALLOY & TEMPER	6063 T6
DESCRIPTION	TRANSPORT MISC. SECTION
	PRODUCT CODE:-072
	HSN CODE:- 76042990