


P-19096

S6125

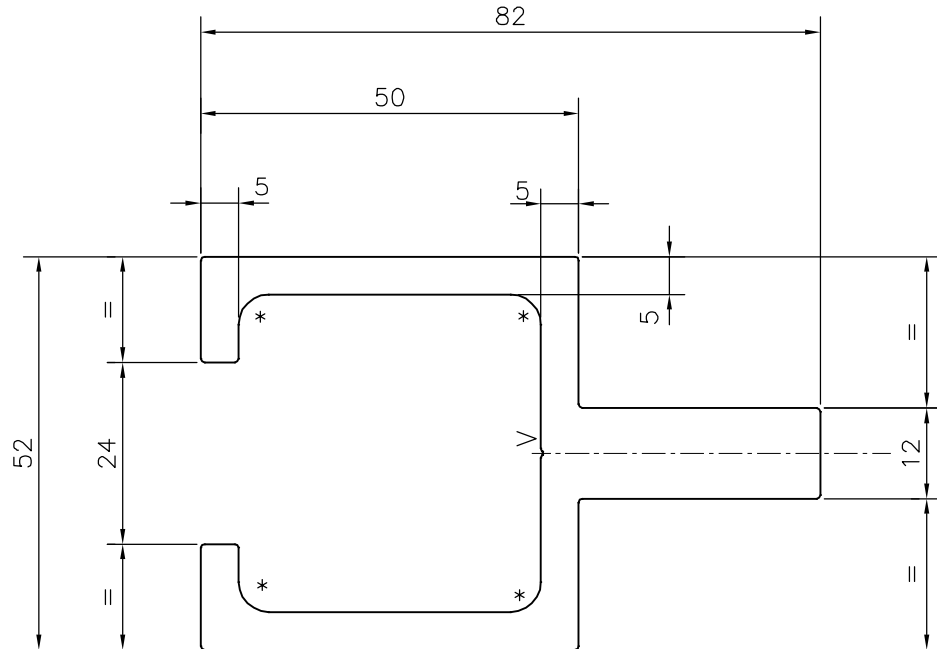

UNSPECIFIED RADIUS 0.5 mm

V = V GROOVE 0.3x90° (1 PLACE)

* = 4.0 RADIUS (4 PLACES)

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

	NAME	DATE
DRAWN	J.P.KAUSHIK	04-02-2019
CHECKED		
APPROVED	B.NATARAJA	07-02-2019

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER IS:3965-1981, UNLESS OTHERWISE SPECIFIED

SCALE	1:1
AREA mm ²	1197.134
PERIMETER mm.	384.737

PARTY'S NAME	PALLAVI ENGINEERING COMPANY, BANGALORE
PARTY'S DRAWING No.	CDR-9006013
ALLOY & TEMPER	6063 T6
DESCRIPTION	MISC. SECTION

WEIGHT kg/m	3.232
DRAWING No.	SECTION No.
P-19096	-
S6125	S6125