


P-17544


S5567

X2545

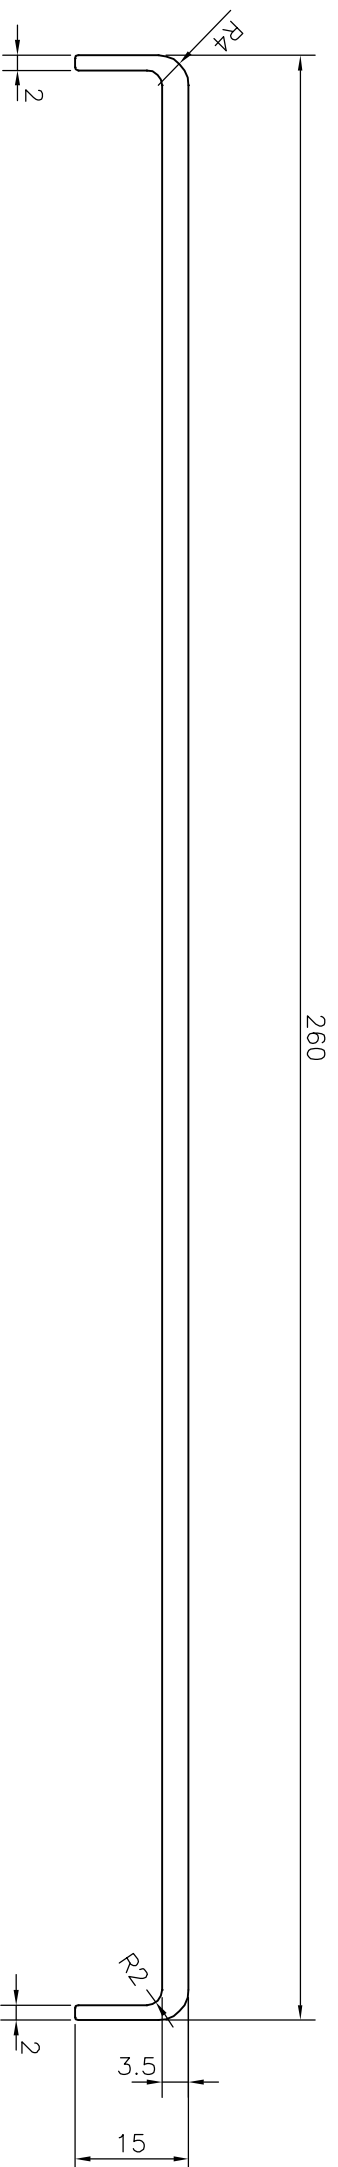

TOLERANCES ON OVERALL WIDTHS & WIDTHS ACROSS FLATS OF BARS, & REGULAR SECTIONS

UPTO 6.40mm - ±0.20	UPTO 32.0mm - ±0.38	UPTO 120.0mm - ±0.85	UPTO 320.00mm - ±1.70
UPTO 10.0mm - ±0.23	UPTO 50.0mm - ±0.46	UPTO 160.0mm - ±1.02	
UPTO 12.0mm - ±0.25	UPTO 60.0mm - ±0.53	UPTO 200.0mm - ±1.14	
UPTO 16.0mm - ±0.28	UPTO 80.0mm - ±0.69	UPTO 250.0mm - ±1.40	
UPTO 25.0mm - ±0.30	UPTO 100.0mm - ±0.75	UPTO 300.0mm - ±1.65	

 SYMBOL OF QUALITY AN ISO 9001 COMPANY	JINDAL ALUMINIUM LTD. BANGALORE-560073 (INDIA)		DRAWN	J.P.KAUSHIK	DATE	11-10-2017
	1. ALL DIMENSIONS ARE IN mm. 2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm. 3. TOLERANCES WILL BE AS PER IS:3965-1981 UNLESS OTHERWISE SPECIFIED		CHECKED			
APPROVED			B. NATARAJA		08-11-2017	
PARTY'S NAME		PRESSTON ENGINEERING CORPORATION, BANGALORE	SCALE	1:1		
PARTY'S DRAWING No.		RMD60013CEO-REV_B_C	AREA mm ²	950.712		
ALLOY & TEMPER		6063 T6	PERIMETER mm.	567.163		
DESCRIPTION		DUCT COVER PROFILE	WEIGHT kg/m	2.567		
			DRAWING No.	SECTION No.		
			P-17544	-		
			S5567	S5567		
			X2545	X2545		