




P-19576

X2608

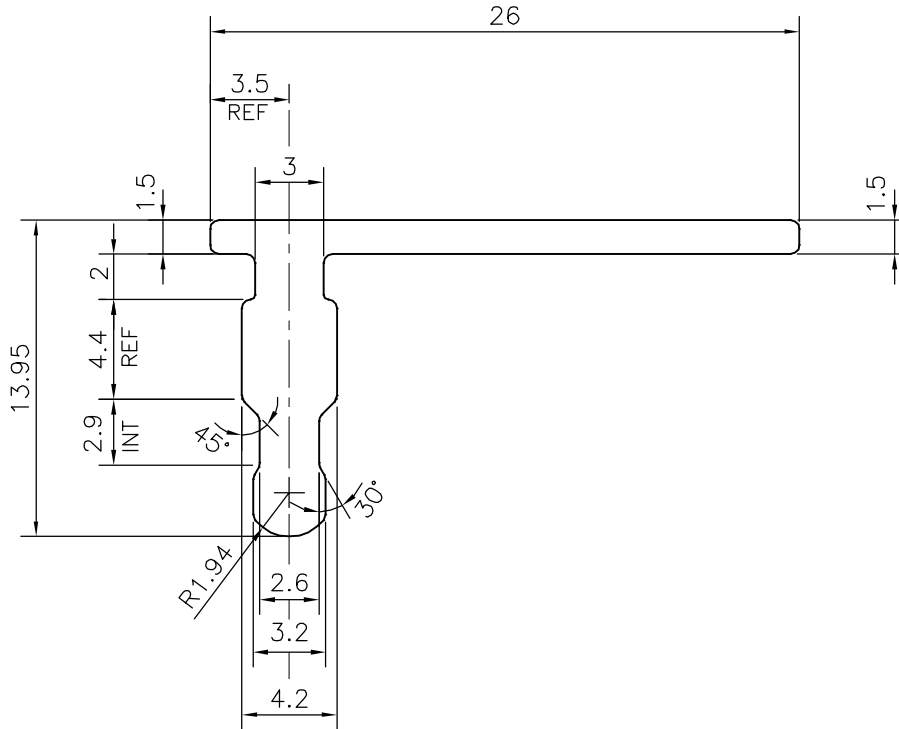

1:1



TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE

| | CD ≤ 100 | 100 < CD ≤ 200 | 200 < CD < 300 | 300 < CD < 500 |
|---------------|----------|----------------|----------------|----------------|
| UPTO 10mm - | ±0.25 | ±0.30 | ±0.35 | ±0.40 |
| 10.0 -25.0 - | ±0.30 | ±0.40 | ±0.50 | ±0.60 |
| 25.0 -50.0 - | ±0.50 | ±0.60 | ±0.80 | ±0.90 |
| 50.0 -100.0 - | ±0.70 | ±0.90 | ±1.10 | ±1.30 |
| 100 - 150 - | - | ±1.10 | ±1.30 | ±1.50 |
| 150 - 200 - | - | ±1.3 | ±1.50 | ±1.80 |
| 200 - 300 - | - | - | ±1.70 | ±2.10 |
| 300 - 450 - | - | - | - | ±2.80 |



SYMBOL OF QUALITY
AN ISO 9001 COMPANY

JINDAL ALUMINIUM LTD.
BANGALORE-560073 (INDIA)

| | NAME | DATE |
|----------------------|-------------|-------------|
| DRAWN | J.P.KAUSHIK | 27-05-2019 |
| CHECKED | | |
| APPROVED | B.NATARAJA | 06-11-2019 |
| SCALE | | 3:1 |
| AREA mm ² | | 80.657 |
| PERIMETER mm. | | 79.349 |
| WEIGHT kg/m | | 0.218 |
| DRAWING No. | | SECTION No. |
| P-19576 | | - |
| X2608 | | X2608 |
| | | |
| | | |

1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER,BS:EN-755-9 UNLESS OTHERWISE SPECIFIED

| | |
|---------------------|-----------------------|
| PARTY'S NAME | ALUMINIUM F/X ,CANADA |
| PARTY'S DRAWING No. | AS PER DRAWING |
| ALLOY & TEMPER | 6063 T6 |
| DESCRIPTION | MISC. SECTION |