


X104083

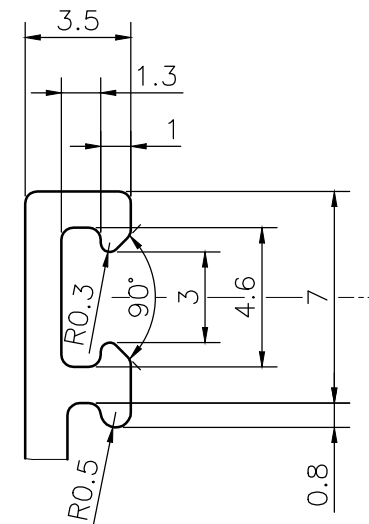


SCALE 1:1

1. STRAIGHTNESS= 1.7mm/M
2. TWIST= 1.7mm/M
3. ANGULARITY= $\pm 2^\circ$
4. FLATNESS= 0.007xWIDTH

TOLERANCE CHART CD = CIRCUMSCRIBING CIRCLE				
DIMENSION	CD≤100	100<CD≤200	200<CD≤300	300<CD≤500
UPTO 10mm	±0.25	±0.30	±0.35	±0.40
10.0 – 25.0	±0.30	±0.40	±0.50	±0.60
25.0 – 50.0	±0.50	±0.60	±0.80	±0.90
50.0 – 100	±0.70	±0.90	±1.10	±1.30
100 – 150	–	±1.10	±1.30	±1.50
150 – 200	–	±1.3	±1.50	±1.80
200 – 300	–	–	±1.70	±2.10
300 – 450	–	–	–	±2.80

CONTROLLED COPY



1. ALL DIMENSIONS ARE IN mm.
2. ROUND OFF ALL SHARP CORNERS WITH 0.40 mm.
3. TOLERANCES WILL BE AS PER BS:EN-755-9 , UNLESS OTHERWISE SPECIFIED

0	PARTY'S NAME	SAY METAL LLP, GURUGRAM	
	PARTY'S DRAWING No.	AS PER CAD DRAWING	
	ALLOY & TEMPER	6063 T6	PRODUCT CODE:-048 HSN CODE:- 76042100
	DESCRIPTION	WINDOW SECTION	

	NAME	DATE
DRAWN	ASHUTOSH	03-06-2025
CHECKED	PARVESH	26-06-2025
APPROVED	J.N.RAI	26-06-2025
SCALE	2:1	
AREA mm ²	399.168	
PERIMETER mm.	316.352	
WEIGHT kg/m	1.078	
DRAWING No.	SECTION No.	
P-JAL-B-1077	7000004452	
X104083	X104083	